

BTX - BEAVERTAIL TRAILER



**IT'S HAUL
OR NOTHING.**



BTX - BUILT FOR SMOOTHER, SAFER LOADING.

The BTX beavertail cuts the loading angle for easier, safer access to low-clearance equipment. Paired with 6'5" MegaRamps™ and quick flip-over operation, you get faster load times and confident control. Built for tough jobs with smart deck use, it's the dependable choice when you need efficiency without the fuss.

HARDCORETRAILERS.COM



BTX - BEAVERTAIL TRAILER




LENGTH: 48'/53'
GVWR: 80,000 LBS
WEIGHT: 13,280 - 13,900 LBS
DECK WIDTH: 102"
RAMPS: MEGASTRENGTH™ 6'5"
DECKING: 11-8" APITONG
HARDWOOD
UPPER DECK LENGTH: 10'6"
LOWER DECK LENGTH: 48'-33'1"
 53'-39'1"

UPPER DECK HEIGHT: 62"
LOWER DECK HEIGHT: 41"
COUPLER HEIGHT: 48"
KING PIN: 2" HOLLAND SETTING 24"
TOP PLATE: 1/4"
MAIN BEAM: 27" HIGH TENSILE STEEL
CROSS MEMBER: 4" STEEL I BEAM ON 12" CENTERS
WEB: GRADE 80 HIGH TENSILE STEEL
FRONT SKIRT: FORMED STEEL WITH TAPERED CORNERS

REAR SKIRT: FORMED STEEL WITH INTEGRAL STAKE POCKETS
LANDING GEAR: HEAVY DUTY 2-SPEED GEAR DRIVE 160,000 LBS CAPACITY
ADJUSTABLE WINCHES: SLIDING C TRACK 12 ON 48' 14 ON 53'
RUB RAIL: 3/8" X 2 1/2" STEEL
SIDE RAIL: 6" STEEL CHANNEL
STAKE POCKETS: STEEL, EXTERNAL MOUNT, 24" ON CENTER WITH DOUBLE PIPE SPOOLS
TIRES: 22.5"
MUD FLAPS: DURABLE BLACK
HUBS: STANDARD CAST, OIL-LUBRICATED, 10-STUD UNIMOUNT, HUB-PILOTED
WHEELS: HUB-PILOTED STEEL

SUSPENSION: HEAVY DUTY AIR RIDE, 25,000 LBS CAPACITY
AXLES: HEAVY DUTY 25,000 LBS CAPACITY SPREAD AXLE OR CLOSED TANDEM
BRAKES: 16-1/2" x 7" DRUM BRAKES, ABS EQUIPPED
PARKING BRAKES: INSTALLED ON ALL AXLES
SIDE MARKERS: DOT - APPROVED LED PIN LIGHTS
REAR LIGHTS: FULL DOT - APPROVED LED SEALED LIGHTS
PAINT: DURASPAR IP

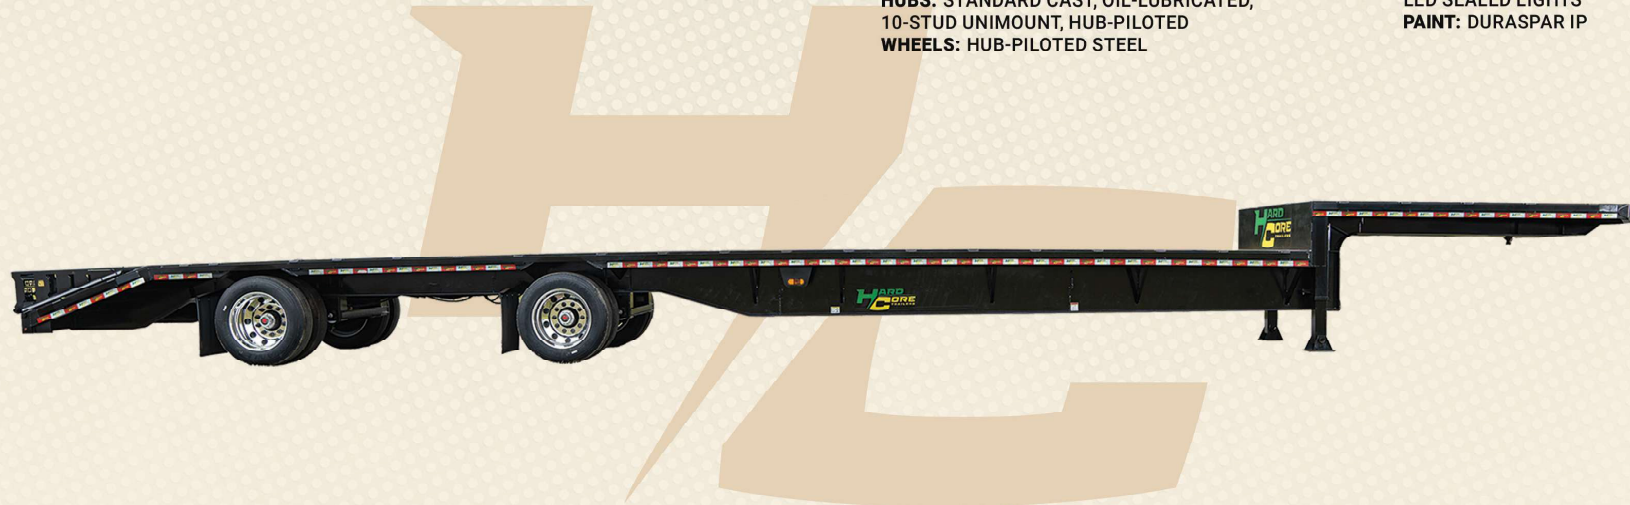

ACTUAL PRODUCT MAY VARY FROM PICTURE



AVAILABLE IN:



RAGE INFERNO



VOLTAGE SURGE



PHANTOM SURGE



SANDSTONE GRIT



MIDNIGHT SURGE



COMBAT GREEN



GUNMETAL STORM



LIGHTNING PULSE